



**PORTABLE  
ABRASIVE BLASTING EQUIPMENT**

## FSV Metering Valve



The Contractor FSV flow control valve is designed for the precise metering of abrasive into the compressed air flow at the outlet of a blast machine.

### Design features

The 45° inclined FSV valve design affords uniform mixture of air and abrasive. The valve's durable control disks provide precise metering of an abrasive quantity. The service port allows the valve to be cleared of clogging. The Contractor FSV flow control valve is designed for working with mineral abrasives (slag).

Order code	Model	Description
10110850	FSV	FSV Flow control valve 1.1/4"

## SVG Metering Valve, Rubber Pipe For SVG Valve



The Contracor SVG flow control valve is designed for the precise metering of abrasive into the compressed air flow at the outlet of a blast machine.

### Design features

The SVG valve is used for metering heavy or aggressive abrasive materials, such as steel shot and grit or aluminium oxide. The SVG design prevents the valve body from coming into contact with the abrasive stream. The abrasive stream only touches the rubber pipe, which may be quickly replaced when worn. The abrasive is metered by means of constricting the rubber pipe by a metering screw.

Order code	Model	Description
10110860	SVG	SVG flow control valve for heavy or aggressive materials
29000038		Rubber pipe for SVG valve, spare part

## Remote Control System For Blast Vessels



The remote control system is used by a single abrasive blasting operator for starting up and shutting down the blast machine. The remote control system comprises a remote control RCV valve and remote control DMH handle, which are connected by a twin hose.

### RCV remote control valve

The RCV remote control valve is used for controlling the compressed air feed to the machine while simultaneously controlling air blow-out from the machine. Both control functions run concurrently when the DMH handle is pressed or released by the abrasive blasting operator. Air is bled from the tank via a damper, which is included in the delivery set.

### Design features

The RCV remote control valve responds when the DMH handle is pressed. The blast machine's tank is pressurized and the abrasive blast cleaning process begins. When the DMH handle is released, the RCV remote control valve closes, the abrasive blast cleaning process terminates and the machine's tank depressurizes.

### DMH remote control handle

The DMH remote control handle is fastened to the nozzle and connected to the RCV remote control valve using a dual hose.

Order code	Model	Description
29005000	RCV-0	Remote control valve 1/2", with silencer and connection kit
29005001		Remote control valve 1/2", without silencer and connection kit
29005200		Silencer for RCV-0 Remote control valve 1/2"
10110870	RCV	Remote control valve 1.1/4", with silencer and connection kit
29000056		Remote control valve 1.1/4", without silencer and connection kit
29000058		Silencer for RCV Remote control valve 1 1/4"
10110880	DMH	DMH Remote control handle

## Blast Machine Spares BlastRazor Z / Z-RC / Z-RCS



Order code	Description	Z	Z-RC	Z-RCS
10110930	Moisture separator 1 1/4", CAF-3	■	■	■
10110960	Pop-up valve, rubber	■	■	■
10110950	O-Ring, rubber	■	■	■
10110900	Sandblast coupling 1 1/4, CFT	■	■	■
10110980	Rubber gasket for CFT/CQT, spare part			

## Rubberized Fittings For Blast Machines BlastRazor Z / Z-RC / Z-RCS



Order code	Description	Z	Z-RC	Z-RCS
10110990	Y-piece 45° 1 1/4" rubberized	■	■	
10110911	Nipple 1 1/4" rubberized	■	■	■
10110921	Pipe 1 1/4" (100mm) rubberized	■	■	
10110948	T-piece, 90°, 1 1/4" (FFF), rubberized			■



**HOSES FOR ABRASIVE BLASTING,  
REMOTE CONTROL HOSES**





## Blasting Hoses EXTRA BLAST



**ABRASION RESISTANCE**  
According to DIN ISO 4649:2013  
Max. 60 mm<sup>3</sup>  
Avg. 52 mm<sup>3</sup>.

### TUBE

Black conductive NR – abrasion resistant.

### REINFORCEMENT

High tensile textile cords.

### COVER

Black conductive SBR/NR blend – abrasion and ozone resistant – pin pricked.

### TEMPERATURE

-30°C +80°C.

### NOTE

Tolerances according to "RMA" class 311-A.

SAFETY FACTOR 3:1.

Order code	Model	Description
10112110	ExtraBlast-13	Abrasive Blast Hoses 13x27, roll 5m
10112111	ExtraBlast-13	Abrasive Blast Hoses 13x27, roll 20m
10112109	ExtraBlast-13	Abrasive Blast Hoses 13x27, roll 40m
10112112	ExtraBlast-19	Abrasive Blast Hoses 19x33, roll 20m
10112100	ExtraBlast-19	Abrasive Blast Hoses 19x33, roll 40m
10112113	ExtraBlast-25	Abrasive Blast Hoses 25x39, roll 20m
10112101	ExtraBlast-25	Abrasive Blast Hoses 25x39, roll 40m
10112114	ExtraBlast-32	Abrasive Blast Hoses 32x48, roll 20m
10112102	ExtraBlast-32	Abrasive Blast Hoses 32x48, roll 40m

## Remote Control Hoses TWINLINE



Order code	Model	Description
10112105		Remote control hose, d=6 mm, mounted with fittings, roll 5m
10112106		Remote control hose, d=6 mm, mounted with fittings, roll 20m
10112103		Remote control hose, d=6 mm, mounted with fittings, roll 40m





**BLAST HOSE COUPLINGS,  
SAFETY CABLES**

## Nozzle Holders, Nylon



Material: nylon.  
Thread 50 mm –  
suitable for the tread of  
CONTRACOR® nozzles.

For abrasive blasting hoses with. Equipped with a rubber washer and screws.

Order code	Model	Description
10112209	NHP-0	Nylon nozzle holder, for hose diameter 13 x 27 mm
10112200	NHP-3/4	Nylon nozzle holder, for hose diameter 19 x 33 mm
10112201	NHP-1	Nylon nozzle holder, for hose diameter 25 x 39 mm
10112202	NHP-2	Nylon nozzle holder, for hose diameter 32 x 48 mm

Order code	Description
10112208	Rubber gasket for NHP-0
10112207	Rubber gasket for NHP-3/4
10112203	Rubber gasket for NHP-1
10112204	Rubber gasket for NHP-2

## Blast Hose Quick Couplings



CQP material: nylon.  
CQT material: metal.

For abrasive blasting hoses with. Compatible with hose couplings CFT on CONTRACOR® abrasive blasting machines. Delivery: rubber washer, screws, safety clip.

Order code	Model	Description
10112309	CQP-0	Nylon hose coupling, for hose diameter 13 x 27 mm
10112300	CQP-3/4	Nylon hose coupling, for hose diameter 19 x 33 mm
10112301	CQP-1	Nylon hose coupling, for hose diameter 25 x 39 mm
10112302	CQP-2	Nylon hose coupling, for hose diameter 32 x 48 mm

Order code	Model	Description
10112319	CQT-0	Malleable iron hose couplings, zinc plated, yellow passivated, for hose diameter 13 x 27 mm
10112311	CQT-1	Malleable iron hose couplings, zinc plated, yellow passivated, for hose diameter 25 x 39 mm
10112312	CQT-2	Malleable iron hose couplings, zinc plated, yellow passivated, for hose diameter 32 x 48 mm

Order code	Description
10110981	Rubber gasket for CQP-0 / CQT-0 / CFT-0
10112307	Rubber gasket for CQP-3/4
10112303	Rubber gasket for CQP-1 / CQP-2
10110980	Rubber gasket for CQT-1 / CQT-2 / CFT-1

## Hose Safety Cables



Corrosion resistant steel cables with plated springs and aluminium ferrules

### Instructions of use:

Attach blast hose safety cables at all coupled connections. Before connecting the couplings, pull back the spring-loaded loop, slip it over the blast hoses only (not the remote control lines). Connect the hose coupling and slide the ends of the safety cable back until the cable is straight and the hose is slightly bent.

Contracor® blast hose Whipcheck Safety Cables are used at all blast hoses for the safe holding of coupled connections in case of accidental separation. The Whipcheck Safety Cables relieve the couplings of the weight of the hose and reduce the danger caused by hose couplings failure. The Cables also help keeping the blast hose from whipping about in the event of a coupling failure. Hose couplings may separate from air and blast hoses for a variety of reasons:

- Coupling screws may lose their holding power due to internal wear on the hose tubing
- Use of improper coupling screws may interfere with the proper fit between couplings and hose
- Hose outer diameter may be too small for the coupling
- The continual strain caused by pulling hoses around job sites can weaken the coupling's grip on the hose
- Couplings can also have been damaged by vehicles or other equipment.

Whipcheck Safety Cables are strongly recommended by vertical applications, when air and blast hoses are suspended. Hose couplings are not designed to support the weight of the hose. Additional supports are required to relieve the added tension. Constructed of corrosion resistant, high strength steel, Whipcheck Safety Cables may be installed on hose-to-hose and hose-to-fixed coupling connections.

Order code	Description
10112321	Safety Cables up to 1" I.D.
10112322	Safety Cables 1.1/4" – 3" I.D.



**BLAST NOZZLES**

## Abrasive Blast Nozzles

Contracor offers a wide choice of abrasive blast nozzles made from high-quality tungsten carbide, silicon carbide or boron carbide. Various nozzle types and jacket materials are available.



### Contracor Venturi Nozzles

Venturi bore nozzles produce a wide blast pattern and intensify abrasive velocity as much as 100% per given pressure. Venturi nozzles are the best option for increased productivity when blasting larger areas. Long Venturi style nozzles provide approximately a 40% increase in productivity in comparison with straight bore nozzles. Additionally, abrasive consumption can be reduced by about 40%.



### Contracor Double Venturi Nozzles

The double Venturi style can be regarded as two nozzles in a row with a gap and holes in between to facilitate the entry of atmospheric air into the downward part of the nozzle. The exit segment is also wider than an ordinary nozzle. This modification increases the size of the blast pattern and minimizes a reduction in abrasive velocity.

## Choice of nozzle material

### Tungsten carbide (TC)

Resistant to mechanical stress. It's best suitable for outdoor use with mineral abrasives such as slag, garnet and others.

### Silicon carbide (SiC)

Light and wear resistant. Universal use with aluminum oxide, silicon carbide, steel shot or mineral slag and garnet.

### Boron carbide (B4C)

Very lightweight with the longest service life. Used for aggressive abrasives such as aluminum oxide, silicon carbide, steel grit.



\* All values are indicative and approximate and given for nozzle comparison purposes only. Actual nozzle service life will depend on blast media, blast pressure, media dimensions and media particle profile.

## Blast nozzles PERFORMER



abrasive blast nozzles  
made from high-quality  
tungsten carbide (TC).

### Nozzles PERFORMER 400

Performer is the latest development of high performance Venturi blast cleaning nozzles. New modern and highly wear resistant liners are equipped with a rugged and lightweight polyurethane jacket. Whether blasting with high aggressive Fused Aluminas, Silicon Carbides and Steel Grits or blasting with Expendable slag-based abrasives - in Contracor Performer nozzles range you will find the best suitable nozzle for your application. Performer nozzles are available in five sizes to achieve maximum productivity of abrasive blast cleaning system. You can select correct nozzle bore to suit compressed air supply and optimize blast media consumption.

Wear-resistant Venturi blasting nozzles made of tungsten carbide (TC). Service life: up 400 h.  
Cover: Polyurethane. Thread: Aluminum, 50 mm for NHP nozzle holder. Entry size: 32 mm.

Order code	Model	Description
10113061	Performer 400 x 5.0	Venturi nozzle, tungsten carbide, 5.0 mm x 130 mm
10113062	Performer 400 x 6.5	Venturi nozzle, tungsten carbide, 6.5 mm x 130 mm
10113063	Performer 400 x 8.0	Venturi nozzle, tungsten carbide, 8.0 mm x 150 mm
10113064	Performer 400 x 9.5	Venturi nozzle, tungsten carbide, 9.5 mm x 170 mm
10113065	Performer 400 x 11.0	Venturi nozzle, tungsten carbide, 11.0 mm x 200 mm
10113066	Performer 400 x 12.5	Venturi nozzle, tungsten carbide, 12.5 mm x 210 mm





abrasive blast nozzles  
made from high-quality  
silicon carbide (SiC).

## Nozzles PERFORMER 600

Performer is the latest development of high performance Venturi blast cleaning nozzles. New modern and highly wear resistant liners are equipped with a rugged and lightweight polyurethane jacket. Whether blasting with high aggressive Fused Aluminas, Silicon Carbides and Steel Grits or blasting with Expendable slag-based abrasives - in Contracor Performer nozzles range you will find the best suitable nozzle for your application. Performer nozzles are available in five sizes to achieve maximum productivity of abrasive blast cleaning system. You can select correct nozzle bore to suit compressed air supply and optimize blast media consumption.

Wear-resistant Venturi blasting nozzles made of silicon carbide (SiC). Service life: up 600 h.  
Cover: Polyurethane. Thread: Aluminum, 50 mm for NHP nozzle holder. Entry size: 32 mm.

Order code	Model	Description
10113071	Performer 600 x 5.0	Venturi nozzle, silicon carbide, 5.0 mm x 130 mm
10113072	Performer 600 x 6.5	Venturi nozzle, silicon carbide, 6.5 mm x 130 mm
10113073	Performer 600 x 8.0	Venturi nozzle, silicon carbide, 8.0 mm x 150 mm
10113074	Performer 600 x 9.5	Venturi nozzle, silicon carbide, 9.5 mm x 170 mm
10113075	Performer 600 x 11.0	Venturi nozzle, silicon carbide, 11.0 mm x 200 mm
10113076	Performer 600 x 12.5	Venturi nozzle, silicon carbide, 12.5 mm x 210 mm



abrasive blast nozzles  
made from high-quality  
boron carbide (B<sub>4</sub>C).

## Nozzles PERFORMER 1000

Performer is the latest development of high performance Venturi blast cleaning nozzles. New modern and highly wear resistant liners are equipped with a rugged and lightweight polyurethane jacket. Whether blasting with high aggressive Fused Aluminas, Boron Carbides and Steel Grits or blasting with Expendable slag-based abrasives - in Contracor Performer nozzles range you will find the best suitable nozzle for your application. Performer nozzles are available in five sizes to achieve maximum productivity of abrasive blast cleaning system. You can select correct nozzle bore to suit compressed air supply and optimize blast media consumption.

Wear-resistant Venturi blasting nozzles made of boron carbide (B<sub>4</sub>C). Service life: up 1000 h.  
Cover: Polyurethane. Thread: Aluminum, 50 mm for NHP nozzle holder. Entry size: 32 mm.

Order code	Model	Description
10113081	Performer 1000 x 5.0	Venturi nozzle, boron carbide, 5.0 mm x 130 mm
10113082	Performer 1000 x 6.5	Venturi nozzle, boron carbide, 6.5 mm x 130 mm
10113083	Performer 1000 x 8.0	Venturi nozzle, boron carbide, 8.0 mm x 150 mm
10113084	Performer 1000 x 9.5	Venturi nozzle, boron carbide, 9.5 mm x 170 mm
10113085	Performer 1000 x 11.0	Venturi nozzle, boron carbide, 11.0 mm x 200 mm
10113086	Performer 1000 x 12.5	Venturi nozzle, boron carbide, 12.5 mm x 210 mm

## Blast Nozzles CLASSIC TC Venturi Type



abrasive blast nozzles  
made from high-quality  
tungsten carbide (TC).

### Nozzles type RTC

Wear-resistant Venturi blasting nozzles made of tungsten carbide (TC).

Venturi bore nozzles produce a wide blast pattern and intensify abrasive velocity as much as 100% per given pressure. Venturi nozzles are the best option for increased productivity when blasting larger areas. Long Venturi style nozzles provide approximately a 40% increase in productivity in comparison with straight bore nozzles. Additionally, abrasive consumption can be reduced by about 40%.

Service life: up 400 h. Cover: Rubber. Thread: Rubber, 50 mm for NHP nozzle holder. Entry size: 32 mm.

Order code	Model	Description
10112062	RTC-6.5	Venturi nozzle, tungsten carbide, 6.5 mm x 130 mm
10112063	RTC-8.0	Venturi nozzle, tungsten carbide, 8.0 mm x 150 mm
10112064	RTC-9.5	Venturi nozzle, tungsten carbide, 9.5 mm x 170 mm
10112065	RTC-11.0	Venturi nozzle, tungsten carbide, 11.0 mm x 200 mm
10112066	RTC-12.5	Venturi nozzle, tungsten carbide, 12.5 mm x 210 mm

## Nozzles type DVTC

Wear-resistant Double Venturi blasting nozzles made of tungsten carbide (TC).

The double Venturi style can be regarded as two nozzles in a row with a gap and holes in between to facilitate the entry of atmospheric air into the downward part of the nozzle. The exit segment is also wider than an ordinary nozzle. This modification increases the size of the blast pattern and minimizes a reduction in abrasive velocity.

Service life: up 400 h. Cover: Aluminum / rubber. Thread: Aluminum, 50 mm for NHP nozzle holder.

Entry size: 32 mm.

Order code	Model	Description
10112092	DVTC-6.5	Double Venturi nozzle, tungsten carbide, 6.5 mm x 130 mm
10112093	DVTC-8.0	Double Venturi nozzle, tungsten carbide, 8.0 mm x 150 mm
10112094	DVTC-9.5	Double Venturi nozzle, tungsten carbide, 9.5 mm x 170 mm
10112095	DVTC-11.0	Double Venturi nozzle, tungsten carbide, 11.0 mm x 200 mm
10112096	DVTC-12.5	Double Venturi nozzle, tungsten carbide, 12.5 mm x 210 mm

## Blast Nozzles CLASSIC TC Short Type



abrasive blast nozzles  
made from high-quality  
tungsten carbide (TC).

### Nozzles type STC

Wear-resistant short Venturi blasting nozzles made of tungsten carbide (TC). Service life: up 400 h.  
Cover: Rubber. Thread: Rubber, 50 mm for NHP nozzle holder. Entry size: 25 mm.

Order code	Model	Description
10112570	STC-5.0	Short Venturi nozzle, tungsten carbide, 5.0 mm x 80 mm
10112571	STC-6.5	Short Venturi nozzle, tungsten carbide, 6.5 mm x 80 mm
10112572	STC-8.0	Short Venturi nozzle, tungsten carbide, 8.0 mm x 80 mm
10112573	STC-9.5	Short Venturi nozzle, tungsten carbide, 9.5 mm x 80 mm
10112574	STC-11.0	Short Venturi nozzle, tungsten carbide, 11.0 mm x 80 mm
10112575	STC-12.5	Short Venturi nozzle, tungsten carbide, 12.5 mm x 80 mm

### Nozzles type MTC

Wear-resistant short Venturi blasting nozzles made of tungsten carbide (TC). Service life: up 400 h.  
Cover: aluminum. Thread: aluminum, 50 mm for NHP nozzle holder. Entry size: 25 mm.

Order code	Model	Description
10112560	MTC-5.0	Short Venturi nozzle, tungsten carbide, 5.0 mm x 80 mm
10112561	MTC-6.5	Short Venturi nozzle, tungsten carbide, 6.5 mm x 80 mm
10112562	MTC-8.0	Short Venturi nozzle, tungsten carbide, 8.0 mm x 80 mm
10112563	MTC-9.5	Short Venturi nozzle, tungsten carbide, 9.5 mm x 80 mm
10112564	MTC-11.0	Short Venturi nozzle, tungsten carbide, 11.0 mm x 80 mm
10112565	MTC-12.5	Short Venturi nozzle, tungsten carbide, 12.5 mm x 80 mm

## Blast Nozzles CLASSIC TC Stick-up Type



abrasive blast nozzles  
made from high-quality  
tungsten carbide (TC).

### Nozzles type GTC

Wear-resistant Venturi type hose insert nozzles made of tungsten carbide (TC). Special designed for using with blast hose ID=25 mm. Service life: up to 400 h. Jacket: Aluminum.

Order code	Model	Description
10112031	GTC-5.0	Venturi nozzle, tungsten carbide, 5.0 mm x 100 mm
10112032	GTC-6.5	Venturi nozzle, tungsten carbide, 6.5 mm x 100 mm
10112033	GTC-8.0	Venturi nozzle, tungsten carbide, 8.0 mm x 100 mm

### Nozzles type HTC

Wear-resistant Venturi type hose insert nozzles made of tungsten carbide (TC). Special designed for using with blast hose ID=32 mm. Service life: up to 400 h. Jacket: Aluminum.

Order code	Model	Description
10112502	HTC-6.5	Venturi nozzle, tungsten carbide, 6.5 mm x 120 mm
10112503	HTC-8.0	Venturi nozzle, tungsten carbide, 8.0 mm x 120 mm
10112504	HTC-9.5	Venturi nozzle, tungsten carbide, 9.5 mm x 120 mm
10112505	HTC-11.0	Venturi nozzle, tungsten carbide, 11.0 mm x 120 mm
10112506	HTC-12.5	Venturi nozzle, tungsten carbide, 12.5 mm x 120 mm

## Blast Nozzles CLASSIC B4C Venturi Type



abrasive blast nozzles  
made from high-quality  
boron carbide [B4C].

### Nozzles type DVBC

Wear-resistant Venturi blasting nozzles made of boron carbide [B4C].

The double Venturi style can be regarded as two nozzles in a row with a gap and holes in between to facilitate the entry of atmospheric air into the downward part of the nozzle. The exit segment is also wider than an ordinary nozzle. This modification increases the size of the blast pattern and minimizes a reduction in abrasive velocity.

Service life — up to 1000 h. Cover: Aluminum /Polyurethane protector. Thread: Aluminum, 50 mm for NHP nozzle holder. Entry size: 32 mm.

Order code	Model	Description
10112042	DVBC-6.5	Double Venturi nozzle, boron carbide, 6.5 mm x 130 mm
10112043	DVBC-8.0	Double Venturi nozzle, boron carbide, 8.0 mm x 150 mm
10112044	DVBC-9.5	Double Venturi nozzle, boron carbide, 9.5 mm x 170 mm
10112045	DVBC-11.0	Double Venturi nozzle, boron carbide, 11.0 mm x 200 mm
10112046	DVBC-12.5	Double Venturi nozzle, boron carbide, 12.5 mm x 210 mm



## Blast Nozzles CLASSIC B<sub>4</sub>C Stick-up Type



abrasive blast nozzles  
made from high-quality  
boron carbide (B<sub>4</sub>C).

### Nozzles type GBC

Wear-resistant Venturi blasting nozzles made of boron carbide (B<sub>4</sub>C). Special designed for using with blast hose ID=25 mm. Service life: up to 1000 h. Cover: Aluminum.

Order code	Model	Description
10112071	GBC-5.0	Venturi nozzle, boron carbide, 5.0 mm x 100 mm
10112072	GBC-6.5	Venturi nozzle, boron carbide, 6.5 mm x 100 mm
10112073	GBC-8.0	Venturi nozzle, boron carbide, 8.0 mm x 100 mm

### Nozzles type HBC

Wear-resistant Venturi blasting nozzles made of boron carbide (B<sub>4</sub>C). Special designed for using with blast hose ID=32 mm. Service life: up to 1000 h. Cover: Aluminum.

Order code	Model	Description
10112082	HBC-6.5	Venturi nozzle, boron carbide, 6.5 mm x 120 mm
10112083	HBC-8.0	Venturi nozzle, boron carbide, 8.0 mm x 120 mm
10112084	HBC-9.5	Venturi nozzle, boron carbide, 9.5 mm x 120 mm
10112085	HBC-11.0	Venturi nozzle, boron carbide, 11.0 mm x 120 mm
10112086	HBC-12.5	Venturi nozzle, boron carbide, 12.5 mm x 120 mm

## Internal Pipe Blast Nozzles 360°



Internal Pipe Blasting  
Nozzles Type PTC-360°



Internal pipe blasting nozzles type PTC-360° are designed to blast clean the interior of pipes ranging in size from 2.½" to 5" I.D. The nozzle connected an abrasive blast machine in place of a standard nozzle. In operation, the PTC-360° nozzle directs the air/abrasive mixture at a deflection tip. This tip causes the blast pattern to fan out into a wide, circular pattern, which cleans the inside of the pipe as the nozzle is passed through. Made from tungsten carbide (TC). Fits all Contracor nozzle holders.

### Characteristics

Highly wear-resistant angle type blasting nozzles. Made from tungsten carbide (TC). Lifetime: Up to 400 h.  
Jacket: Aluminum. Thread: Aluminum, 50 mm for NHP nozzle holder.

Order code	Model	Description
10112590	PTC-360°	Internal pipe blasting nozzle, tungsten carbide, 8.0mm x 75mm
29010007		Deflection tip for PTC- 360°, tungsten carbide (TC)

## Internal Pipe Blast Nozzles 360°L



Internal Pipe Blasting  
Nozzles Type PTC-360°



Internal pipe blasting nozzles type PTC-360°L are designed to blast clean the interior of pipes ranging in size from 3/4" to 2" I.D. The nozzle connected an abrasive blast machine in place of a standard nozzle. In operation, the PTC-360°L nozzle directs the air/abrasive mixture at a deflection tip. This tip causes the blast pattern to fan out into a wide, circular pattern, which cleans the inside of the pipe as the nozzle is passed through. The length of the working area is 200 mm. Made from tungsten carbide (TC). Fits all Contracor nozzle holders.

### Characteristics

Highly wear-resistant angle type blasting nozzles. Made from tungsten carbide (TC). Lifetime: Up to 400 h.  
Jacket: Aluminum. Thread: Aluminum, 50 mm for NHP nozzle holder.

Order code	Model	Description
10112595	PTC-360°L	Internal pipe blasting nozzle, tungsten carbide, 5.0 mm x 200 mm
29002001		Exchangeable deflection tip for PTC- 360°L, tungsten carbide (TC)

## Angle Blast Nozzles ATC



Angle nozzles are used for getting inside tight or hard to reach places like corners, behind flanges or inside pipes. ATC type angle nozzles are compact and shoot out the abrasive at 45° angles. Made from tungsten carbide (TC). Fits all Contracor nozzle holders.

### Characteristics

Highly wear-resistant angle type blasting nozzles. Made from tungsten carbide (TC). Lifetime: Up to 400 h. Jacket: Rubber. Thread: 50-mm coarse rubber thread.

Order code	Model	Description
10112511	ATC-5.0-1	Angle nozzles, tungsten carbide, bore 1x45°
10112512	ATC-6.5-1	Angle nozzles, tungsten carbide, bore 1x45°
10112513	ATC-8.0-1	Angle nozzles, tungsten carbide, bore 1x45°
10112514	ATC-9.5-1	Angle nozzles, tungsten carbide, bore 1x45°
10112521	ATC-5.0-2	Angle nozzles, tungsten carbide, bore 2x45°
10112522	ATC-6.5-2	Angle nozzles, tungsten carbide, bore 2x45°
10112523	ATC-8.0-2	Angle nozzles, tungsten carbide, bore 2x45°
10112524	ATC-9.5-2	Angle nozzles, tungsten carbide, bore 2x45°
10112531	ATC-5.0-3	Angle nozzles, tungsten carbide, bore 3x45°
10112532	ATC-6.5-3	Angle nozzles, tungsten carbide, bore 3x45°
10112533	ATC-8.0-3	Angle nozzles, tungsten carbide, bore 3x45°
10112534	ATC-9.5-3	Angle nozzles, tungsten carbide, bore 3x45°

## Bending Blast Nozzles BTC



Bending nozzles are used for getting inside tight or hard to reach places like corners, behind flanges or inside pipes. BTC type bending nozzles are compact and shoot out the abrasive at 45° angles. Made from tungsten carbide (TC). Fits all Contracor nozzle holders.

### Characteristics

Highly wear-resistant angle type blasting nozzles. Made from tungsten carbide (TC). Lifetime: Up to 400 h.  
Jacket: Aluminum / Polyurethane protector Thread: 50-mm coarse rubber thread.

Order code	Model	Description
10112581	BTC-6.5	Bending nozzle, tungsten carbide, angle 45°, 6.5 mm x 125 mm
10112582	BTC-8.0	Bending nozzle, tungsten carbide, angle 45°, 8.0 mm x 125 mm
10112583	BTC-9.5	Bending nozzle, tungsten carbide, angle 45°, 9.5 mm x 125 mm
10112584	BTC-11.0	Bending nozzle, tungsten carbide, angle 45°, 11.0 mm x 125 mm
10112585	BTC-12.5	Bending nozzle, tungsten carbide, angle 45°, 12.5 mm x 125 mm

## Short Blast Nozzles NTC



Wear-resistant short Venturi blasting nozzles made of tungsten carbide (TC).

### Characteristics

Service life - up to 400 h. Cover: Aluminum Thread: Aluminium, 3/4" for NHP-0 nozzle holder.

Order code	Model	Description
10112550	NTC-3.5	Short Venturi nozzle, tungsten carbide, 3,5 mm x 45 mm
10112551	NTC-5.0	Short Venturi nozzle, tungsten carbide, 5,0 mm x 45 mm
10112552	NTC-6.5	Short Venturi nozzle, tungsten carbide, 6,5 mm x 45 mm
10112553	NTC-8.0	Short Venturi nozzle, tungsten carbide, 8,0 mm x 45 mm

## Water Injection Blast Attachment WBA



Water induction  
blast nozzles.



Contracor® water blast equipment has been specifically designed to meet growing customer demand for a multi-purpose cleaning system that is fast, economical and environment-friendly.

### Field of application

Dust-reducing high-performance cleaning of steel, stone and concrete surfaces. Cleaning up to grade SA-3.0. Performance up to 20% higher than dry blasting.

### Designed to work with

any water matching abrasives, max. grain size 3,5 mm. Universal Water Blast Attachment. Sleeve made from high grade tungsten carbide. Fits all Contracor® blast nozzles. Jacket: Aluminum. Thread: 50-mm coarse aluminum thread.

Order code	Model	Description
10112000	WBA	Water Blast Attachment, tungsten carbide sleeve



## Water Injection Blast Nozzles WBN



Water induction  
blast nozzles.



Contracor® water blast equipment has been specifically designed to meet growing customer demand for a multi-purpose cleaning system that is fast, economical and environment-friendly.

### Field of application

Dust-reducing high-performance cleaning of steel, stone and concrete surfaces. Cleaning up to grade SA-3.0. Performance up to 20% higher than dry blasting.

### Designed to work with

any water matching abrasives, max. grain size 3,5 mm. Water blast nozzles for wet blast applications. Made from high grade tungsten carbide. Jacket: Aluminum. Thread: 50-mm coarse aluminum thread.

Order code	Model	Description
10112005	WBN-MINI-5,0	Water blast nozzle, boron carbide, 5,0 mm, thread 3/4" for NHP-0
10112006	WBN-MINI-6,5	Water blast nozzle, boron carbide, 6,5 mm, thread 3/4" for NHP-0
10112007	WBN-MINI-8,0	Water blast nozzle, boron carbide, 8,0 mm, thread 3/4" for NHP-0
10112002	WBN-6.5	Water blast nozzle, tungsten carbide, dia. 6.5, entry 32 mm
10112003	WBN-8.0	Water blast nozzle, tungsten carbide, dia. 8.0, entry 32 mm
10112004	WBN-9.5	Water blast nozzle, tungsten carbide, dia. 9.5, entry 32 mm



**SPECIAL  
APPLICATION EQUIPMENT**

## Internal Pipe Blast Tool PBT-1



- For pipes 3" (75mm) - 12" (300mm) ID
- Adjustable centering carriage for consistent blast pattern
- Use with standard blast machine



The PBT-1 pipe cleaning tool is an ideal companion to clean blast pipes from 2" (50mm) to 12" (300mm) inner diameter. The PBT-1 consists of a tungsten-carbide nozzle in a venturi form with a tungsten-carbide circular deflection tip, which blasts abrasive media in a continuous circle pattern. The tungsten carbide materials ensure low wear and a long service life. Centering collars and carriage allow fitting the PBT-1 to any pipe with an inner diameter between 3" (75mm) and 12" (300mm). With the centering collars PBT-1 can be used in the 3" (75mm) to 5" (125mm) I.D. pipe range. With centering carriage PBT-1 is adjustable to handle all diameters between 5" (125mm) and 12" (300mm) I.D.

### Standard delivery

Centering collars sets, centering carriage.

Order code	Model	Description
10112630	PBT-1	Pipe blasting tool 3" (75mm) - 12" (300mm) with 12,5 mm nozzle and tungsten carbide (TC) deflection tip. Complete package incl. centering collars sets and centering carriage.

## Internal Pipe Blast Tool PBT-2 ROTOBLAST



- For pipes 12" (304,8 mm) to 36" (914,4 mm) ID
- Variable feed and optimal rotation speed offers flexibility in cleaning rates for varying surface conditions
- Adjustable centering carriage for consistent blast pattern
- Use with standard blast machine

The PBT-2 ROTOBLAST is an accessory for all Contracor blast machines that allows easy cleaning of the internal surface of steel pipes. It is durable, portable, and most of all, easy to use. It guaranteed considerable increases in productivity. The PBT-2 ROTOBLAST consists of an adjustable centre carriage and a constant speed rotating blast head to produce a uniform cleaned blast surface. The carriage is infinitely adjustable from 12" (304,8mm) to 36" (914,4mm) inside diameter. The rotating head is driven by compressed air and two radially positioned blast nozzles. The adjustment of the feed allows a high operational flexibility with all degrees of corrosion of the inner surfaces. The PBT-2 ROTOBLAST unit can be operated with nozzle sizes from 6.5mm to 9.5mm inner diameter.

### Standard delivery

Legs set, 2 x NTC(F)-6.5 nozzles, 10 x spare leather washers.

Order code	Model	Description
10112730	PBT-2 ROTOBLAST	Pipe blasting tool 12" (304,8mm) - 36" (914,4mm). Complete package incl. Legs set, 2 x NTC(F)-6.5 nozzles, 10 x spare leather washers
29003025	NTC(F)-6.5	Dia. 6.5 mm TC Blast nozzle for PBT-2 ROTOBLAST
29003026	NTC(F)-8.0	Dia. 8.0 mm TC Blast nozzle for PBT-2 ROTOBLAST
29003027	NTC(F)-9.5	Dia. 9.5mm TC Blast nozzle for PBT-2 ROTOBLAST

## Closed Circuit Blast Tool EDUCT-O-MATIC



Hand-portable closed-circuit blast tool.

The Educt-O-Matic is the compact hand-portable closed-circuit blast tool, which can be transported everywhere and required just 2.5m<sup>3</sup>/min of air at 6bar. Blasting and media recovery are controlled just with one trigger. Media recovery is initiated by slightly pulling the trigger, while pulling the trigger fully starts the suction blast system.

Abrasive is stored in a compact conical hopper from where it is metered into the blast apparatus. Abrasive is drawn into the mixing chamber of the Educt-O-Matic by the high speed airstream, where it is mixed with air, and is then propelled out of the nozzle. The blast head is adjustable and swivels to allows blasting at any angle. Abrasive and dust are captured in the rubber attachment. Reusable abrasive is drawn back to the hopper, whereas broken abrasive and dust are directed to the dust bag. An area about 30mm wide can easily be cleaned with an Educt-O-Matic. When finished with blasting, just release the trigger to half-way for two to three seconds, and the vacuum recovers the remaining dust and abrasive. Vacuuming is stopped by fully releasing the trigger. The Educt-O-Matic works best with with steel or iron grit. Dust and broken abrasive are captured in a simple cotton bag.


### Standard delivery

EDUCT-O-MATIC, 6 attachments and dust bag.

Order code	Model	Description
10112800	Educt-O-Matic	Hand-portable closed-circuit blast tool. Complete package incl. 6 attachments and dust bag



## Blast Recovery System BRS

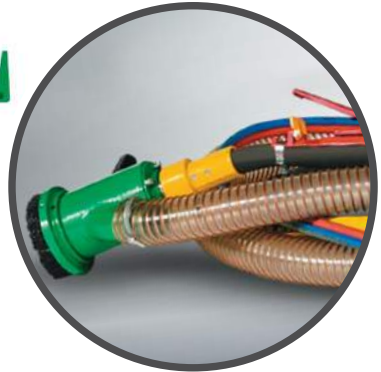

portable design; electrically driven powerful vacuum; dust cyclone separator with removable screen; dust collector with cartridge filter; pulse jet filter cleaning with timer control; adjustable blasting pressure; compressed air filter /moisture separator

Closed-circuit abrasive blast cleaning, ideal for indoor blasting where dust and abrasive contaminants should be avoided, for the blasting of welding seams and for spot repairs. Used blast media are recyclable non-metallic media: glass bead, aluminum oxide (corundum).

The BRS Blast Recovery System is an electrically operated, pressure-feed closed-circuit blast machine, which can be used where open-air blasting is prohibited, or is not possible or practical. Blasting and simultaneous media recovery are initiated by pulling the DMH handle. Keeping the blast area clean allows the operator to blast without the need to encapsulate the area or wear respiratory protective equipment.

### Standard delivery

BRS systems are mounted on the portable frame and include a cyclone dust separator and media reclaimer, a dust collector with a cartridge filter and automatic pulse jet filter cleaning, a fully pneumatic remote control and blast pressure control, an adjustment device and a compressed-air moisture filter. The BRS system includes a combined blast and vacuum head, fitted with a nylon-bristle brush that presses against the blast surface. The BRS recovery head assembly comprises a blast nozzle and a vacuum hose, which evacuates dust and the rebounding abrasive following its contact with the blast surface. This BRS recovery head contains the abrasive and keeps the surrounding area clean. DMH handle.

Order code	Model	Description
10300002	BRS-5	Portable closed-circuit Blast Recovery System, standard delivery



## Abrasive Recovery System VAC-5

compact system; electric high-performance vacuum pump; high output of up to 4 tonnes per hour; cartridge filter with automatic pulse cleaning; suitable for retrofitting the existing z-200 blast machine

The VAC-5 abrasive recovery system is an electrically powered vacuum suction unit with an integrated high-performance cartridge filter comprising pulse-jet cleaning, an abrasive storage silo (mounted directly on the Contracor Z-200 series blast machine) for automatically refilling the blast machine and a floor hopper, complete with suction hoses and a grating.

### Application

The VAC-5 abrasive recovery system is specially designed for recovering and recycling used abrasive.

The vacuum suction unit is used to intake abrasive via an abrasive storage silo, separating out any dust to clean the abrasive. The abrasive storage silo is mounted directly above the Contracor Z-200 blast machine. The drawn-in abrasive falls into the blast machine and can be immediately reused. The system allows the recovery of up to 4 tonnes of abrasive per hour at a distance of up to 10 metres from the blast machine.

The VAC-5 abrasive recovery system also allows blasting chambers to be designed flexibly and cost-effectively.

Order code	Model	Description
10300100	VAC-5	Vacuum abrasive recovery system



## Portable Suction Blast Tool POWER GUN



- Lightweight, portable and easily transportable tool
- Suitable for use with all media containers, or even straight out of the bag
- Simple work principle – just plunge the suction lance into the container of abrasive and pull the trigger
- Easy to use and maintain

The Contracor Power Gun is a suction blast tool ideally suited to small jobs or locations with limited air supplies. Thanks to its light weight and compact dimensions, the Contracor Power Gun can be used in places where erecting a conventional pressure blast machine would be awkward or inconvenient.

The Power Gun can be used with all common blast media, to clean or etch metal, glass, stone or other hardwearing surfaces.

To operate the Power Gun, just connect it to a compressed air source, and submerge the suction lance to which the abrasive hose is connected partially into a container of blast media.

To commence blasting, simply depress the lever on the Power Gun. The tool operates according to Bernoulli's principle, where a low-pressure area is created by the compressed air rushing past the abrasive-injection point, where the abrasive hose is connected to the gun. This low-pressure area draws abrasive into the airstream, where mixing takes place. The air-abrasive mix is then exhausted out of the gun and strikes the blasting surface.

### Standard delivery

Power Gun - suction lance and 5m suction hose with hose clamps.

Power Set - Power Gun, AirFlex-19 air hose 5m, SKG-19 air hose coupling, clamp.

Order code	Model	Description
10112900	Power Gun	Portable suction type blast tool. Complete package incl. suction lance and 5m suction hose.
10112930	Power Set	Portable Suction Blast Tool with blast media container and 5m air hose.

## Portable Suction Blast Tool SFG



- Lightweight, portable and easily transportable tool
- Suitable for use with all media containers, or even straight out of the bag
- Optionally with a transportable container for blast media
- Simple work principle – just plunge the suction lance into the container of abrasive and pull the trigger
- Easy to use and maintain

The Contracor SFG Gun is a suction blast tool ideally suited to small jobs or locations with limited air supplies. Thanks to its light weight and compact dimensions, the Contracor SFG Gun can be used in places where erecting a conventional pressure blast machine would be awkward or inconvenient. The SFG Gun can be used with all common blast media, to clean or etch metal, glass, stone or other hardwearing surfaces. To operate the SFG Gun, just connect it to a compressed air source, and plunge the suction lance into the blast media, or alternatively, fill blast media into the portable container. To commence blasting, simply depress the lever on the SFG Gun. The tool operates according to Bernoulli's principle, where a low-pressure area is created by the compressed air rushing past the abrasive-injection point, where the abrasive hose is connected to the gun. This low-pressure area draws abrasive into the airstream, where mixing takes place. The air-abrasive mix is then exhausted out of the gun and strikes the blasting surface.

### Standard delivery

SFG Gun – Suction Feed Blasting Gun with ceramic nozzle 8mm and air jet 4mm, suction lance, 3 m transparent suction hose, hose clamps. SFG Set - SFG Gun, portable container, air hose 3m, SKG-13 air hose coupling, hose clamps.

Order code	Model	Description
10115120	SFG Gun	Suction Feed Blasting Gun with ceramic nozzle 8mm and air jet 4mm, suction lance, 3 m transparent suction hose, hose clamps
10115000	SFG Set	SFG Gun, portable container, air hose 3m, SKG-13 air hose coupling, hose clamps
10115100		Spare part - Suction Feed Blasting Gun with ceramic nozzle 8mm and air jet 4mm (without suction lance, suction- and air hose, portable container)

## Blast Light ABL



- 800 lumens, concentrated light cone
- Modern LED technology
- Light housing is specially designed for blast hose mounting
- Simple and fast exchange of the disposable glass
- Mounted ABL light will not interfere with the normal operation of DMH handle

The ABL blast light is designed for illuminating a working area during sandblast cleaning operations. The lamp runs on 12 volts and provides a bright concentrated light which can be directed at the working area. It utilizes an approximately 800-lumen bright LED module to produce a concentrated light cone. The ABL blast light attaches to the sandblast hose and does not interfere with operation of the DMH handle. The operator does not have to hold the light in one hand in order for it to work effectively.

The modern LED light runs on a 230V AC/12V DC transformer, supplied along with the package. The lamp has a hermetically sealed design and is protected against dust and abrasive material. A stable and replaceable deflector glass protects the lamp against abrasive material damage. The disposable glass can be easily replaced once the rubber cover is removed. The LED light is supplied with a 20m power cord.



### Standard delivery

Assembled 12V LED light, AC/DC transformer, 20m. extension power cord.

Order code	Model	Description
29004100	ABL	LED Blast light, approx. 800 lumens, included Lamp assembly with waterproof connector, AC/DC transformer, 20m. extension power cord with waterproof connectors
29004000		Lamp assembly with waterproof connector, spare part for 29004100 only
29004013		AC/DC transformer, Input 230V- AC, Output 12V= DC
29004014		Extension power cord, 20m, with waterproof connectors




**OPERATOR SAFETY EQUIPMENT**

## Abrasive Blasting Helmet COMFORT



Easy and sure locking window frame. Air flow indicator for safety. 6-point nylon suspension have quick and easy adjustments. Pressure regulator. Durable nylon cape. Handle for easy transportation. Exchangeable cotton neck seal.

This very comfortable, lightweight and value-formoney hood is suitable for any kind of abrasive blasting work. Its design ensures constant airflow to the visor in order to prevent misting. The Comfort hood is equipped with a pressure regulator, an airflow indicator and a cape.



### COMFORT disposable lenses

In Comfort blast helmet regular glass, protected with a stainless steel wire mesh screen, is used as disposable lens. Replacement is easy and cheap, as a simple glass plate can be cut to size and used as replacement.

Order code	Model	Description
10130810	Comfort	Blast Helmet, durable nylon cape



## Breathing Air Filter BAF



Designed to be used for supplying clean air to the blasting hood.

The BAF filter is designed to remove condensate, oil and up to 98% of particles having a size of 0,5 microns less.

The BAF breathing air filter is equipped with a pressure regulator, a pressure gauge, a safety valve and a drain valve.

The filter can be retrofit to work for two or more operators.

**WARNING!**  
The BAF filter does not remove carbon monoxide (CO) and other toxic gases.

## Air Filter Replacement Cartridge ACF

Replacement cartridges for the ACF breathing air filter. The cartridge should be replaced after ca. 450 hours of operation. A filter only needs to be bought once. The cartridge alone is subject to regular replacement. The frequency of cartridge replacement depends on the quality of air supplied to the hood.



### How the cartridge works:

Carded cotton removes macro particles.

Activated alumina absorbs oil and moisture.

Activated charcoal removes odors and moisture.

Felt material removes macro particles.

Carded cotton additionally removes macro particles.

Respiratory felt at final stage acts as final filter before air is transferred to operator (B).

Water is removed by vortex action of air in outer cylinder.

Order code	Model	Description
10130400	BAF-1	Air Filter. Complete package incl. 2 outputs, pressure regulator, drain valve, safety valve
10130401	ACF	Air Filter Cartridge

## Breathing Air Conditioner CCT



The output temperature of the CCT air conditioner is up to  $\pm 20^{\circ}\text{C}$  below or above the input temperature.

The CCT breathing air conditioner is designed for use with all blast helmets Comfort, Aspect, Commander and Panorama. It functions according to the principle of airflow separation and intended for heating or cooling breathing air which travels from the breathing air filter to the blast helmets.

Order code	Model	Description
10130840	CCT	Air conditioner cold /hot for blast helmets COMFORT and ASPECT

## Breathing Air Hose BAH



For connection between blasting hood and airline filter BAF.

Special thick-wall hose made from non-toxic materials. Thick-walls prevents the hose from buckling and pinching.

Order code	Model	Description
10130909	BAH	Breathing air hose 9x15mm, with mounted fittings, 20 m. Roll
10130900	BAH	Breathing air hose 9x15mm, with mounted fittings, 40 m. Roll

## Blast Overall, HEAVY-DUTY



### Advantages

Both zip and velcro closure for double dust protection

Cotton inner layer reduced leather pulling in the knees

Elastic seals around the arms



Fastenings on the pants prevent the entry of dust under the clothing

Double-seamed for more durability

Long sleeves leather gloves



- Double stitching for long service life
- Gauntlet gloves protect hands and wrist
- Adjustable straps on cuffs help keep dust and abrasive at bay for any operator.
- Durable leather panels protect arms and legs, while durable breathable cotton back improves operator comfort.

The Contracor heavy-duty blast overall with gauntlet-style leather gloves protect the operator from rebounding abrasive media. The arms and legs are protected by durable leather panels, while heavy-duty breathable cotton fabric on the back permits an air-flow, increasing operator comfort. The Contracor heavy-duty blast overall is equipped with both zip and Velcro closures for double dust protection, elastic seals around the arms and fastenings on the pants to keep out dust and abrasive. Double stitching on the overall ensures long service life.

Order code	Size	Description
10130700	50 ( S )	Heavy-Duty Blast Overall, Leather / Cotton, incl. gloves. Cert. to ISO14877:2002
10130701	52 ( M )	Heavy-Duty Blast Overall, Leather / Cotton, incl. gloves. Cert. to ISO14877:2002
10130702	54 ( L )	Heavy-Duty Blast Overall, Leather / Cotton, incl. gloves. Cert. to ISO14877:2002
10130703	56 ( XL )	Heavy-Duty Blast Overall, Leather / Cotton, incl. gloves. Cert. to ISO14877:2002
10130704	58 ( XXL )	Heavy-Duty Blast Overall, Leather / Cotton, incl. gloves. Cert. to ISO14877:2002
10130705	60 ( XXXL )	Heavy-Duty Blast Overall, Leather / Cotton, incl. gloves. Cert. to ISO14877:2002
10130710		Long sleeves leather gloves. Cert. to ISO14877:2002



## Blast overall, LIGHT-DUTY



### Advantages

Both zip and velcro closure for double dust protection

Elastic seals around the arms



Double-seamed for more durability



Long sleeves leather gloves



- Weighs and costs less than Contracor heavy-duty blast overall.
- Sailcloth and cotton construction is easily machine washable.
- Comfortable to use in the summer time or in the countries with hot climate

The Contracor light-duty blast overall protects the operator from rebounding abrasive media. It is an inexpensive substitute for a heavy-duty overall, especially for short-term work or non-blast personnel working intermittently at a blast site. Through its lighter weight, the light-duty overall is more comfortable to wear in hot climates and in summer. The sailcloth and cotton fabrics are easily machine washable. After a job involving toxic elements, discarding a light-duty overall is more economically sensible than throwing a heavy-duty overall away.

Order code	Size	Description
10130780	50 ( S )	Light blast overall, sailcloth / cotton, incl. gloves, Cert. to ISO 14877:2002
10130781	52 ( M )	Light blast overall, sailcloth / cotton, incl. gloves, Cert. to ISO 14877:2002
10130782	54 ( L )	Light blast overall, sailcloth / cotton, incl. gloves, Cert. to ISO 14877:2002
10130783	56 ( XL )	Light blast overall, sailcloth / cotton, incl. gloves, Cert. to ISO 14877:2002
10130784	58 ( XXL )	Light blast overall, sailcloth / cotton, incl. gloves, Cert. to ISO 14877:2002
10130785	60 ( XXXL )	Light blast overall, sailcloth / cotton, incl. gloves, Cert. to ISO 14877:2002
10130710		Long sleeves leather gloves, grey, Cert. to ISO 14877:2002



**MEASUREMENT EQUIPMENT**

## Surface Roughness Comparator



### GRIT

A precision nickel comparator plate which conforms to International Standard ISO 8503 for grit and shot blast surface roughness comparison measurement. Comparators allow the estimation of surface roughness by touch and sight. They are split into four sections, each with a different and defined roughness.

The grit version is split into sections equivalent to 25, 60, 100 and 150 microns.

### SHOT

A precision nickel comparator plate which conforms to International Standard ISO 8503 for grit and shot blast surface roughness comparison measurement. Comparators allow the estimation of surface roughness by touch and sight. They are split into four sections, each with a different and defined roughness.

The shot version is split into sections equivalent to 25, 40, 70 and 100 microns.

Order code	Model	Description
10170510	SRC-GRIT	Surface Roughness Comparator, GRIT
10170500	SRC-SHOT	Surface Roughness Comparator, SHOT

